


常规常备可加工刃径范围 (0.20 ~ 20.0mm 系列)

Regular stock can be processed into edge diameter of $\Phi 0.20 \sim \Phi 20.0$ mm series

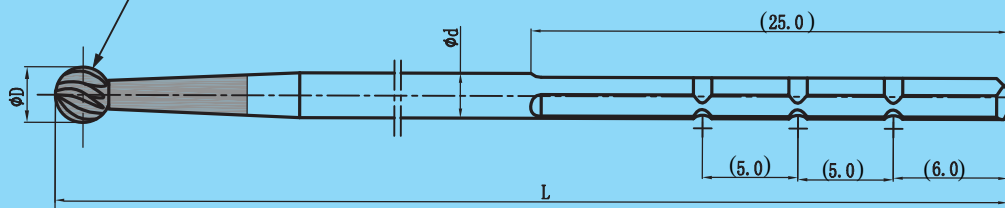

(定制任意柄部形状及长度, 最长可加工至750mm)

(Any shank shape or length can be customized, the longest we can process is up to 750mm)

部分尺寸(AA) (錫鋼對焊式AA級刃口加工)

some sizes(AA) Carbide butt welded AA grade cutting edge process

刃徑 ϕD Diameter	0.50	0.80	1.00	1.40	1.80	2.30	2.70	3.10	3.50	4.00	4.50	5.00	6.00	7.00
柄徑 ϕd Shank Dia.	2.35	2.35	2.35	2.35	2.35	2.35	2.35	2.35	2.35	2.35	2.35	2.35	2.35	2.35
總長 L Overall length 總長さ	70	70	70	70	125	70	70	70/150	70	70	70	70	90	65

(刃錫鋼對焊式加工AA)
 Carbide butt welded process, edge AA



- 柄部為超防腐高硬度高剛性不銹鋼(AA)
(HRC54° ± 2° 斷面)
- 也可依要求加工超複雜的柄部形狀、結構、帶內冷卻孔方式、精度、公差、超總長度等

- Handle material is the super high rust-proof, high-hardness & high-rigidity stainless steel (AA) (HRC54° ± 2° section)
- We can also process super-complicated shank shapes, structures, with inner cooling hole, finish, tolerance and super-long total length as customers' requirement.

Head cutting edge material:

刃口頭部材料:

- ① 超高硬度超耐磨錳鋼(硬質合金)(常規常備為對焊式AA)(整體式可定制)(HRA90° ~ 94° 系列)錳鋼刃
- ② 高抗衝擊超耐磨錳鋼(硬質合金)對焊式(AA)(HRA82° ~ 87° 系列)錳鋼刃(批量才可定制)
- ③ 超防腐高耐磨不銹鋼系列(AA)(HRC54° ± 2° 斷面)
- ④ 常規標準防腐高耐磨不銹鋼系列(A)(HRC56° ~ 64° 斷面系列)

- ① High hardness & high wear-resisting carbide (hard alloy) (The regular stock is welded AA) (Solid type can be customized) (HRA90° ~ 94° series).
- ② High impact resistant & ultra-high wear resistant tungsten steel (carbide) butt welding (AA) (HRA82° ~ 87° series) tungsten steel edge (It can only be customized with big quantity)
- ③ Super-high anti-rust high wear resistance stainless steel series(AA)(HRC54° ± 2° Section)
- ④ General anti-rust high wear resistance stainless steel series(A)(HRC56° ~ 64° Section series)