


醫用工具及配件系列(支抗鑽頭)
Medical tools and parts series(Anchorage Drills)
医療器具及び部品シリーズ(アンカレッジドリルヘッド)

(超防銹高耐磨(AA)&高精度特殊非標成型)
(ultra-high anti-rust(AA)&high precision special nonstandard forming)
超防銹高耐磨耗(AA)&高精度特殊非標準成型

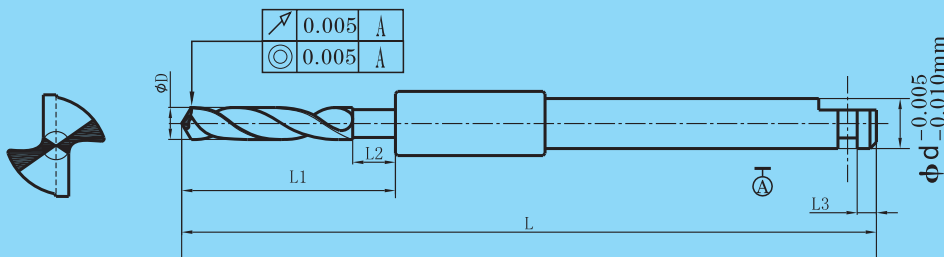


可以至φ0.30mm的微細型鑽針型。
Micro drill point to φ0.30mm

部分尺寸some sizes

	刃徑φD Diameter	1.2	1.2	1.2	1.2	1.2	1.5	1.5	1.5	1.5	1.5
	刃長L1 Length of cut 刃の長さ	8.0	10	12	14	16	8.0	10	12	14	16
	柄徑φd Shank Dia.	2.35	2.35	2.35	2.35	2.35	2.35	2.35	2.35	2.35	2.35
	總長L Overall length 總長さ	32.5	32.5	32.5	32.5	32.5	32.5	32.5	32.5	32.5	32.5
	刃數Z No. of flute	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0

其它規格刃徑、刃長、總長等，可以按要求生產，比如刃徑、1.0;1.1;1.6;1.8;2.0等……
Other specifications such as flute diameter, flute length, total length, etc, can be produced as per requirement, for example, the flute diameter could be 1.0, 1.1, 1.6, 1.8, 2.0, ...

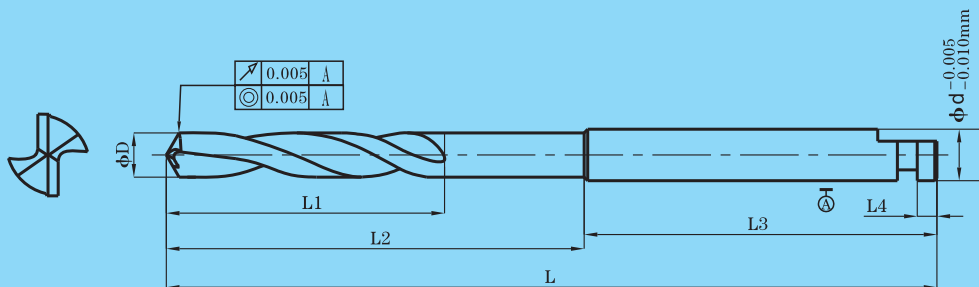

部分尺寸some sizes

	刃徑φD Diameter	1.2	1.4	1.6	2.0	2.2
	刃長L1 Length of cut 刃の長さ	8	8	8	10	10
	柄徑φd Shank Dia.	2.35	2.35	2.35	2.35	2.35
	總長L Overall length 總長さ	36	36	36	36	36
	刃數Z No. of flute	2	2	2	2	2

※ 必要可帶穿透&不穿透，不同等級加工的中空、空芯內孔加工。

With or without penetration, hollow & hollow core inner hole process with different grades.
必要に応じて、貫通付き&貫通なし、各レベル加工での中空、中空内穴加工。

★可超硬、超精研磨。任意的柄部類型、芯厚、容屑槽寬度、刃背方式、鑽尖方式、內冷卻孔方式、刃部結構、刃口角度、刃口鋒利程度之要求。及高可至±0.003mm (3μm) 的尺寸公差要求 We can produce with super hard and super finish grinding and satisfy your requirement of any type of shank, web thickness, width of chip flute, land, drill tip, inner cooling hole, structure of cutting edge, angle of cutting edge, degree of sharpness of cutting edge, and the dimension tolerance can be up to ±0.003mm (3μm)